

## USL 03 LED

### Lumistar syntglasbelysning

P-L3540.015.00  
USL 03 24V/20W

- Kompakt design
- 24V
- LED 5700K
- IP 65-klassad
- Hus i rostfritt stål



## PRODUKTBESKRIVNING


Kompakt design med kraftfullt ljusflöde

För invändig belysning av tank, silo, omrörare och andra slutna kärl och reaktorer samt för visuella flödesindikatorer i icke-explosiva miljöer.

Skyddsklass: damm- och vattenstrålesäker, IP 65

Max. tillåten omgivningstemperatur: 50°C (max. 70°C är möjligt vid beröringsfri drift)

#### Dimensions and electrical data for Lumistar luminaire USL 03/USL 03-LED:

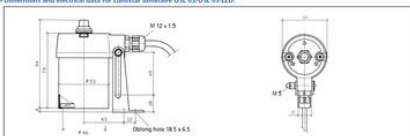

- Components and materials:
  - Luminaire housing: stainless steel 1.4301; head of luminaire: stainless steel 1.4552
  - Mounting parts (flanged bracket or flanged adapter): stainless steel 1.4301
  - Power cable: 3 m (3 x 0.75 mm<sup>2</sup>)
  - Weight: 0.7 kg

#### Order data:

No.	Item	Part-No.
1	Lumistar luminaire USL 03, 24 V/20 W, without pushbutton	3540.015.00
2	Lumistar luminaire USL 03, 24 V/20 W, with pushbutton	3540.020.00
3	Lumistar luminaire USL 03, 24 V/20 W with pushbutton	3540.023.00
4	Lumistar luminaire USL 03-LED, 12 V/2 W GU4, without pushbutton, 5 m UL-connecting cable	3541.381.00
5	Lumistar luminaire USL 03-LED, 24 V/2 W without pushbutton, 5 m UL-connecting cable	3541.377.00
6	Luminaire housing (shaped bracket)	0954.023.00
7	Reflector for 20 W	5904.025.00
8	Reflector for 50 W	5904.025.00
9	O-ring seal between front and rear part of luminaire housing, 50 x 2 mm, 80 shore, Viton	0862.000003
10	2-pin socket G4	1202.011.00
11	2-pin socket G4	1202.015.00
12	2-pin socket GY6.35	1202.023.00
13	LED 12 V/2 W GU4	3233.206.00
14	Halogen lamp 24 V/20 W G4	3232.242.00
15	Halogen lamp 24 V/50 W GY6.35	3232.090.00
16	Pushbutton with cap	0851.011.00
17	O-ring seal for pushbutton, 12 x 2 mm	0862.016.00
18	O-ring seals for fastening screws in head of luminaire, 3.5 x 1.2 mm	0862.076.00