

# USL 05 LED EX

## Synglasbelysning Ex


P-L3540.031.00  
 USL 05-Ex 12V/5W

- För montage på synglas
- 24V/230V
- LED 6500/4000K
- IP 65-klassad
- Hus i aluminium



### PRODUKTBESKRIVNING

Dimensions and electrical data for Luminaire luminaires USL 05-Ex and USL 05-LED-Ex

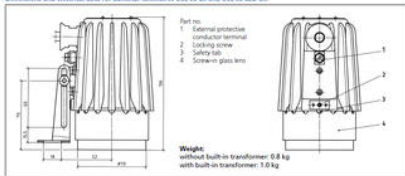

• Components, design and materials:  
 - Body of luminaire: Corrosion-resistant die-cast aluminium alloy, GK-ALSi10Mg  
 - Cable gland with pressure tight resin-cast connecting cable, Dinovera 118 RDGGG 4 3G, 1.5 mm, standard cable length: 2 m  
 - Protective conductor terminal: Internal terminal already connected, additional external protective conductor terminal on enclosure  
 - Light exit: Bonded unit made of aluminiuming and glass. Vision seal  
 - Fastening components: See accessories

• Connecting data: Temperature classification and electrical parameters (see also: EC Type Examination Certificate)

No.	Type USL 05-Ex / Type USL 05-LED-Ex	Part No.	Voltage	Built-in transformer	Halogen temp or LED Illuminance (lm/W)	Ambient temperature range
1	12 V/5 W	3540.031.00	12 V	without	12 V/5 W G4 20 T8 20 T8PC 20 T8C 20 T8TC 20 T8PC	20°C < T <sub>a</sub> < +40°C ; 20°C < T <sub>a</sub> < +40°C
2	12 V/12 V/5 W	3540.032.00	120 V	with	12 V/5 W G4 20 T8 20 T8PC 20 T8C 20 T8TC 20 T8PC	20°C < T <sub>a</sub> < +40°C ; 20°C < T <sub>a</sub> < +40°C
3	230 V/12 V/5 W	3540.033.00	230 V	with	12 V/5 W G4 20 T8 20 T8PC 20 T8C 20 T8TC 20 T8PC	20°C < T <sub>a</sub> < +40°C ; 20°C < T <sub>a</sub> < +40°C
4						
5	12 V/20 W	3540.035.00	12 V	without	12 V/20 W G4 20 T8 20 T8PC 20 T8C 20 T8TC 20 T8PC	20°C < T <sub>a</sub> < +40°C ; 20°C < T <sub>a</sub> < +40°C
6	24 V/20 W	3540.037.00	24 V	without	24 V/20 W G4 20 T8 20 T8PC 20 T8C 20 T8TC 20 T8PC	20°C < T <sub>a</sub> < +40°C ; 20°C < T <sub>a</sub> < +40°C
7						
8						
9	230 V/4 W-LED	3540.039.00	230 V	without	230 V/4 W-LED G210	20 T8 20 T8PC

• Order data:  
 e.g. Luminaire Luminaire USL 05-Ex, 12 V/20 W, Part no. 3540.035.00, with accessories: hinged bracket, Part no. 0354.014.00 and claw spanner, Part no. 6816.001.00

• Accessories:

No.	Component	Part No.
1	Luminaire mounting, hinged bracket, stainless steel	0354.014.00
2	Luminaire mounting, flanged adapter collar, stainless steel	1356.010.00
3	Lumiglas timer module, Ex timer switch, external, for timed light switching on request	on request
4	Claw spanner for screw-in lens, for opening the lamp	6816.001.00