

VAJERGIVARE D125

D125.1000.RC11

Dragvajergiv.D125 10m CANopen

- Mätområde 6 till 10m
- Integrerad inklinometer
- Kan beställas med redundans
- IP67
- -40° till +85 °C




PRODUKTBESKRIVNING

TEKNISK DATA

Acceleration max	10 m/s
Hastighet max	1 m/s
Interface	CANopen DS301
IP-klass	IP67
Kontakter	M12-kontakt
Material Hus	Polykarbonat
Material Vajer	Rostfritt stål
Matningsspänning DC max	30 V DC
Matningsspänning DC min	9 V DC
Mätområde	0 - 100 000mm
Temperaturområde från	-40 °C
Temperaturområde till	85 °C
Upplösning	14 bit

Dimensions

Dimensions in mm (inch)

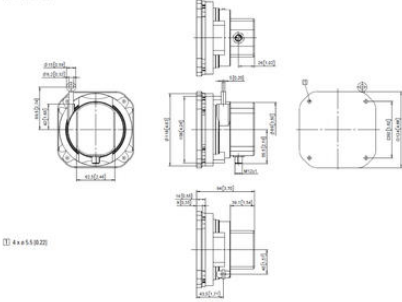

① 4 x 5.5 (0.22)

Terminal assignment

Sensor type	Type of connection	M12 connector, 5-pin
A22, A44, A22, A44 (loading sensor)	Signal	+V
Pin	1	2
	3	4
	5	

Sensor type	Type of connection	M12 connector, 5-pin
RC1 (CANopen)	Signal	+V
Pin	3	2
	1	4
	5	

+V: Power supply +V DC
0 V: Power supply GND (0V)
User 1: Voltage output 1
User 2: Voltage output 2


Top view of mating side, male contact base



M12 connector, 5-pin

Dimensions

Dimensions in mm (inch)

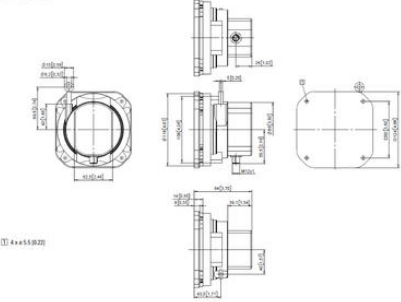

① 4 x 5.5 (0.22)