


## IPX8 KOPPLINGSKONTAKT

1SET212002R0000  
 ISW40-25-L (E1441289)

- 0.75 till 4 mm<sup>2</sup>
- IP klass : IPX8
- Snabbkoppling

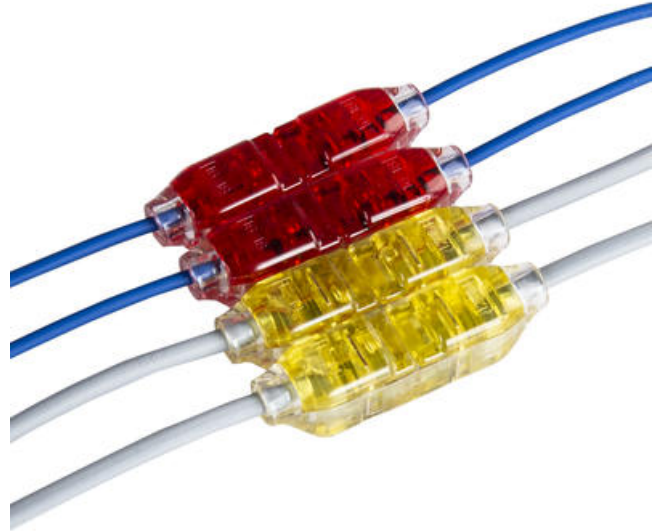

### PRODUKTBESKRIVNING

### TEKNISK DATA

Anslutningsarea flertrådig IEC från	2,5 mm <sup>2</sup>
Anslutningsarea flertrådig IEC till	4 mm <sup>2</sup>
Bredd	12,8 mm
Djup	48 mm
Höjd	21,3 mm
Märkspänning IEC	600 V
Märkström IEC	15 A



Product ordering information

SHELL		OUTLET		Color	P	Part Number	Type	Rated Voltage	Rated Current / Core Section	Dimensions (mm)			
Core Section ref.	Shell ref.	Core Section ref.	Shell ref.							W	Length	Height	Mounting
0.75 - 1.5	14 - 17	2.5 - 4	14 - 17	Red	15	1SET212002R0000	SNAP-ON	600 V	15 A / 25 mm <sup>2</sup>	12.8	48	21.3	15
0.75 - 1.5	14 - 17	2.5 - 4	14 - 17	Blue	15	1SET212002B0000	SNAP-ON	600 V	15 A / 25 mm <sup>2</sup>	12.8	48	21.3	15
0.75 - 1.5	14 - 17	2.5 - 4	14 - 17	Yellow	15	1SET212002Y0000	SNAP-ON	600 V	15 A / 25 mm <sup>2</sup>	12.8	48	21.3	15
0.75 - 1.5	14 - 17	2.5 - 4	14 - 17	Grey	15	1SET212002G0000	SNAP-ON	600 V	15 A / 25 mm <sup>2</sup>	12.8	48	21.3	15

Notes: Minimum Maximum Capacity: 15 A, 25 mm<sup>2</sup>. TE logo.